


XPedite7501

5th Generation Intel® Core™ i7 Broadwell-H Processor-Based Conduction- or Air-Cooled XMC Module

- › Supports 5th generation Intel® Core™ i7 (Broadwell-H) processors (available Q4 2015)
- › Supports 4th generation Intel® Core™ i7 (Haswell) processors
- › XMC (VITA 42) module
- › Conduction or air cooling
- › Up to 16 GB of DDR3L-1600 ECC SDRAM in two channels
- › Up to 32 GB of NAND flash
- › Two x4 or one x8 PCI Express Gen3-capable P15 XMC interface
- › One x4 PCI Express P16 XMC interface
- › Two Gigabit Ethernet ports
- › Four USB 2.0 ports
- › Two SATA ports
- › Two RS-232/422/485 serial ports
- › HDMI/DVI-D or Dual-Mode DisplayPort interface
- › Intel® vPro™/AMT support
- › Wind River VxWorks BSP
- › Linux BSP
- › Microsoft Windows drivers
- › Contact factory for availability of Green Hills INTEGRITY, QNX Neutrino, and LynuxWorks LynxOS BSPs

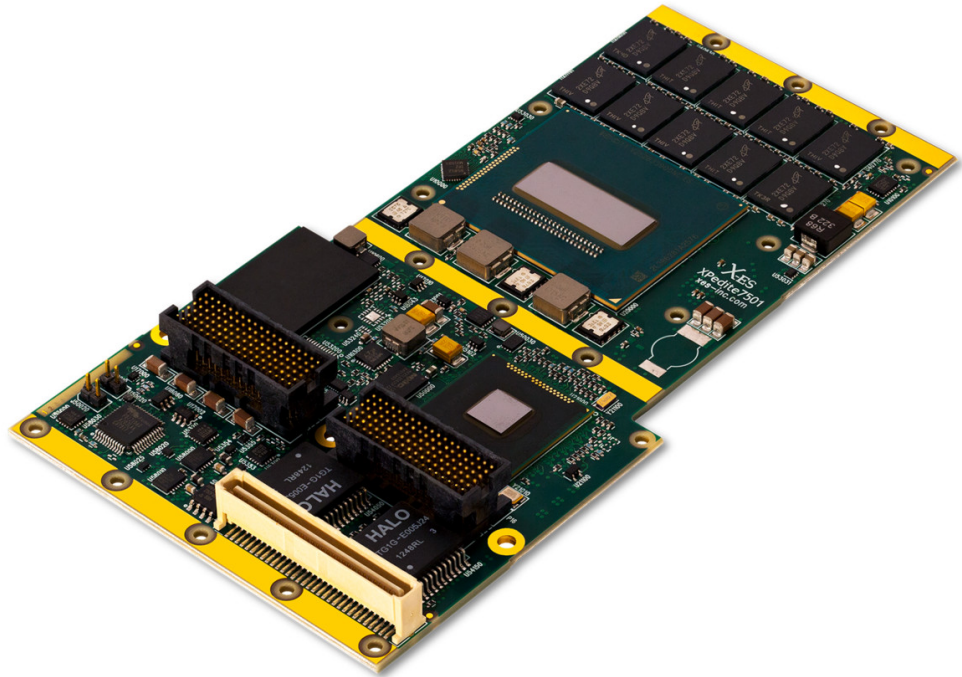

XPedite7501

The XPedite7501 is a high-performance, low-power, XMC module based on the 5th generation Intel® Core™ i7 Broadwell-H processor. With up to three PCI Express Gen3-capable ports and two Gigabit Ethernet ports, the XPedite7501 is ideal for high-bandwidth data processing applications. Floating-Point-intensive applications such as radar, image processing, and signals intelligence will benefit from the performance boost provided by the Intel® Advanced Vector Extensions 2.0 (Intel® AVX2).

The XPedite7501 accommodates up to 16 GB of DDR3L-1600 ECC SDRAM in two channels to support memory-intensive applications and hosts numerous I/O ports, including Gigabit Ethernet, USB, SATA, graphics, and RS-232/422/485. The XPedite7501 leverages Intel® Iris™ Pro graphics for graphics-intensive applications and serves as a general-purpose GPU for demanding data processing applications.

Wind River VxWorks and Linux Board Support Packages (BSPs) are available, as well as Microsoft Windows drivers.



Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

Processor

- 5th generation Intel® Core™ i7 (Broadwell-H)
- 4th generation Intel® Core™ i7 (Haswell)
- Integrated high-performance 3D graphics controller
- Up to Intel® Iris™ Pro Graphics 6200

Memory

- Up to 16 GB of DDR3L-1600 ECC SDRAM in two channels
- Up to 32 GB of NAND flash
- 64 MB NOR boot flash
- 64 kB EEPROM

P14 PMC Interface

- Two USB 2.0 ports
- Two RS-232/422/485 ports
- Two 10/100/1000BASE-T Ethernet ports
- Four 3.3 V GPIO signals

P15 XMC Interface

- One x8 or two x4 PCI Express Gen3-capable links
- Four 3.3 V GPIO signals

P16 XMC Interface

- HDMI/DVI-D or Dual-Mode DisplayPort
- Two USB 2.0 ports
- Two SATA ports capable of 6.0 Gb/s
- One x4 PCI Express Gen3-capable link

Additional Features

- Non-volatile memory write protection
- Optional Trusted Platform Module (TPM)
- IEEE 1588 support on one Gigabit Ethernet port
- Intel® Active Management Technology (AMT) supported by Intel® vPro™ Technology

Software Support

- Wind River VxWorks BSP
- Linux BSP
- Microsoft Windows drivers
- Contact factory for availability of Green Hills INTEGRITY, QNX Neutrino, and LynuxWorks LynxOS BSPs

Physical Characteristics

- XMC form factor
- Dimensions: 149 mm x 74 mm, 10 mm stacking height

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1, 3, 5
- Conformal coating available as an ordering option
- Thermal performance will vary based on CPU frequency and application

Power Requirements

- Power will vary based on configuration and usage. Please consult factory.

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

